


ReliaHome™ Load Centers

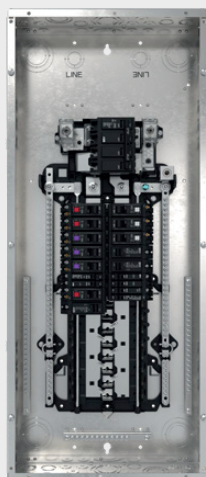

Load Centers for all that matters

ReliaHome is the new, innovative, comprehensive residential portfolio under the ABB brand. The ReliaHome load centers are optimized with a plug-on neutral design in the P-Series offerings with ABB's ReliaLock connection feature. Smaller circuit load centers (2–12 circuits) are included in our T-Series offering. Innovative features make installation and inventory management easier for our customers.

ReliaHome load centers fully replace the PowerMark™ Gold and PowerMark™ PRO load center offerings. By innovating our standard and premium load centers and providing ABB universally compatible ReliaHome residential circuit breakers, we aim to offer a complete and reliable solution that contractors can install and distributors can stock with confidence.

Load Center portfolio migration



	PowerMark PRO	PowerMark Gold	ReliaHome P-Series	ReliaHome T-Series
Plug-on neutral	●		●	
Accepts pigtail circuit breakers	●	●	●	●
Number of spaces	16–60	2–42	16–60	2–12
Bus material	Copper	Copper	Aluminum	Copper
Accepts 1/2" THQP circuit breakers		●		
Color	Gray	Gray	White	Gray
Warranty	Standard	Standard	Standard	Standard

Last Time Buy October 2, 2024

Available to Order October 3, 2024

—
P-Series main circuit breaker

Amperage rating	1 pole 1" spaces	Max single pole circuits	NEMA 1 indoor	NEMA 3R outdoor
100	16	32	PAMC1610W	PAMC1610R
	20	40	PAMC2010W	PAMC2010R
	30	60	PAMC3010W	-
	40	80	PAMC4010W	-
125	24	48	PAMC2412W	-
	30	60	PAMC3012W	-
150	20	40	PAMC2015W	-
	30	60	PAMC3015W	-
	40	80	PAMC4015W	-
200	20	40	PAMC2020W	PAMC2020R
	30	60	PAMC3020W	-
	40	80	PAMC4020W	PAMC4020R
	60	120	PAMC6020W	PAMC6020R

—
P-series main lug

Amperage rating	1 pole 1" spaces	Max single pole circuits	NEMA 1 indoor	NEMA 3R outdoor
125	16	32	PALC1612W	-
	24	48	PALC2412W	PALC2412R
200	20	40	PALC2020W	-
	30	60	PALC3020W	-
	40	80	PALC4020W	PALC4020R
225	40	80	PALC4022W	-


—
T-series main lug

Amperage rating	1 pole 1" spaces	Max single pole circuits	NEMA 1 indoor	NEMA 3R outdoor
40	2	4	TLC240SCU	TLC240RCU
70	2	4	TLC270SCU	TLC270RCU
100	4	8	TLC410C	-
	4	8	TPLCQ410C	-
125	6	12	TLCQ612FCU	-
			TLCQ612FCUD	-
			TLCQ612SCU	-
			TLCQ612SCUD	-
	8	16	TLCQ812FCU	-
			TLCQ812FCUD	-
			TLCQ812SCU	-
			TLCQ812SCUD	-
	12	24	TLCQ1212CCA	-

—
T-Series, Main circuit breaker

Amperage rating	1 pole 1" spaces	Max single pole circuits**	NEMA 1 indoor	NEMA 3R outdoor
100	12	24	TMCQ1210CCA	TMCQ1210RCA
100	12	24	TMCQ1210CCAW	-

ReliaHome T-Series Load Center nomenclature

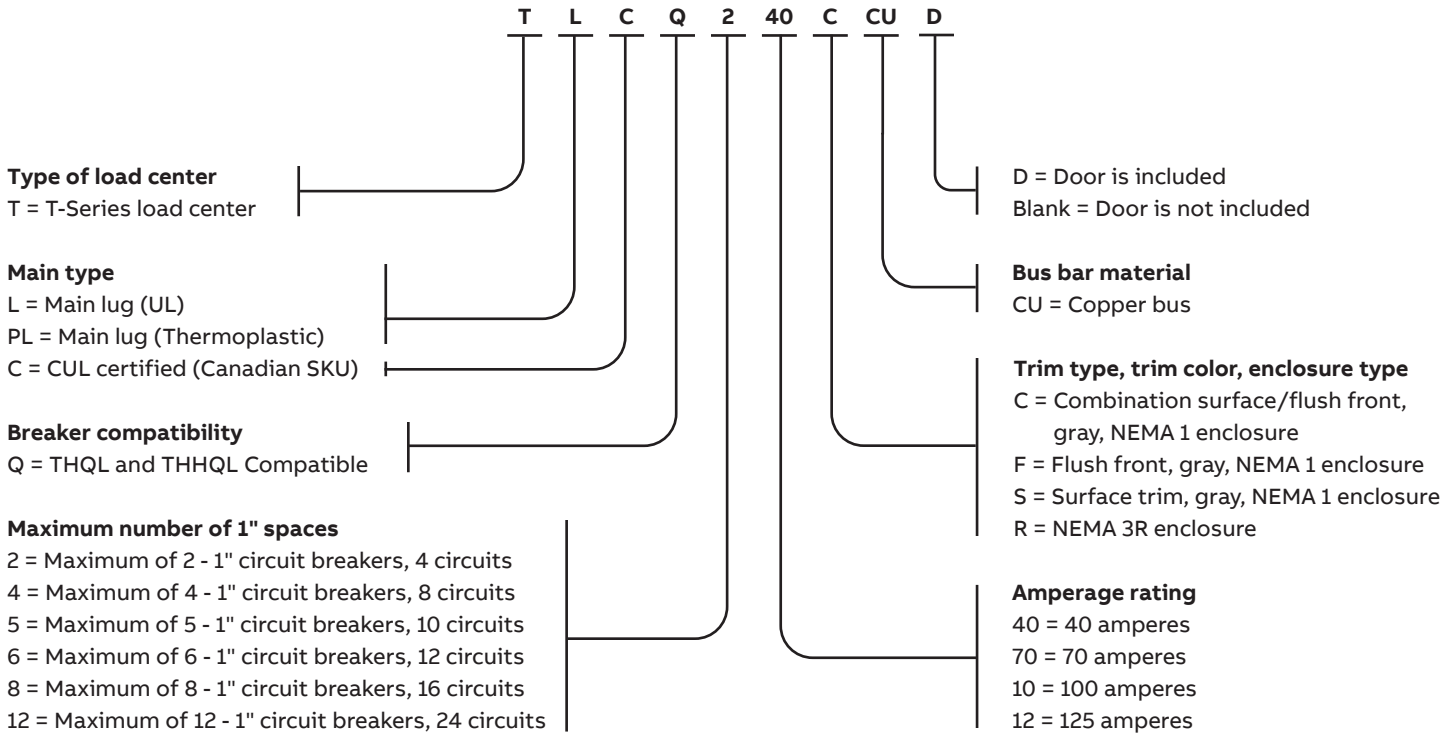

ReliaHome P-Series Load Center nomenclature

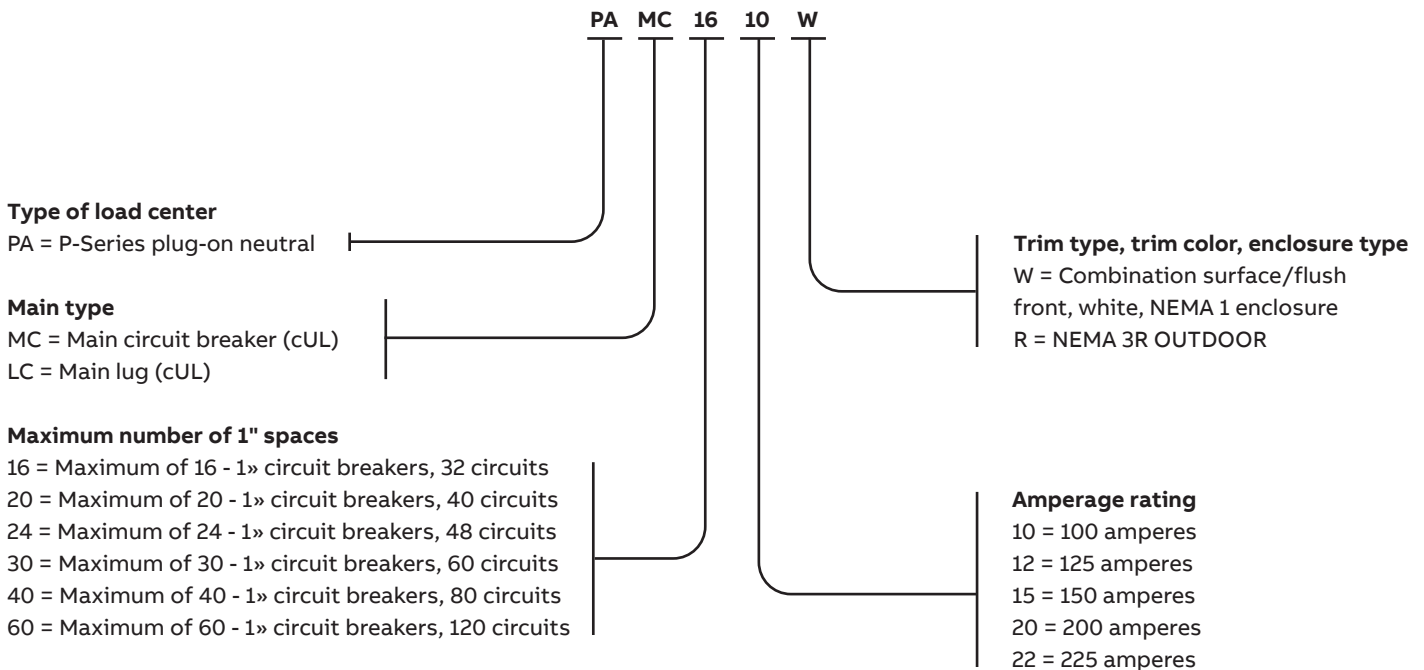




ABB inc.
800, boulevard Hymus
Saint-Laurent, QC, H4S 0B5

new.abb.com/ca/reliahome-load-centres

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright © 2024 ABB. All rights reserved.