



CAT5e


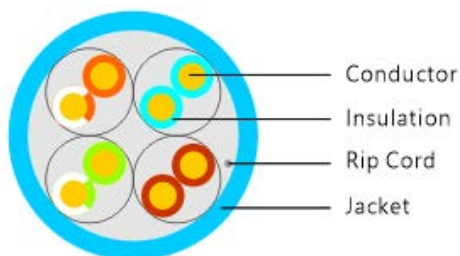


STANDARDS:

- ISO/IEC11801, TIA-568-C.2

ORDERING Information:

PART NUMBER	DESCRIPTION	CATEGORY	COLOURS	PACKAGING	NOMINAL DIAMETER (mm)
PSI-5ECMR-XX	UTP CAT5e 350MHZ 4PR 24 AWG CMR	U/UTP CAT5E-4P- PVC	BL B GR G Y W	1000 Ft. Box	1.05±0.03mm
PSI-5ECMP-XX	UTP CAT5e 350MHZ 4PR 24 AWG CMP	U/UTP CAT5E-4P-PVC-	B G Y W	1000 Ft. Box	85±0.03mm


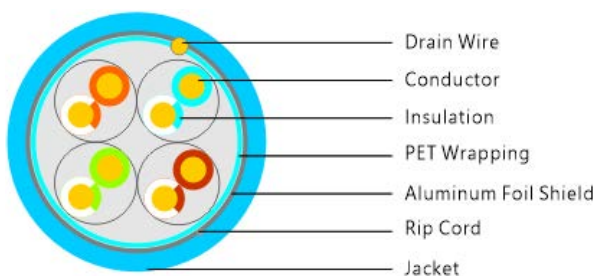


STANDARDS:

- ISO/IEC11801, ANSI/TIA-568-C.2
- UL, c(UL) Listed

ORDERING Information:

PART NUMBER	DESCRIPTION	CATEGORY	PACKAGING	DIAMETER (mm)
PSI-5ECMRSH-BU	4PR/24 SOL CMR Shielded 24 AWG	F/UTP CAT5E-4P- PVC-CMR	1000 Ft. Reel	1.05±0.03mm
PSI-5ECMPSH-BU	4PR/24 SOL CMP Shielded 24 AWG	F/UTP CAT5E-4P-PVC-CMP	1000 Ft. Reel	1.04±0.03mm

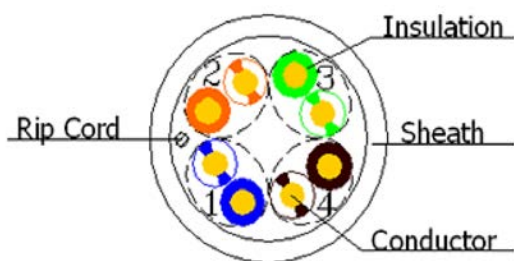

STANDARDS:

- ISO/IEC11801, ANSI/TIA-568-C.2
- Flame Retardancy is verified according to UL 1666
- Weatherometer test is verified according to UL 444
- Comply with ROHS and REACH Directives

ORDERING Information:

PART NUMBER	DESCRIPTION	CATEGORY	PACKAGING	DIAMETER (mm)
PSI-5ECMRX-BX	CAT 5e U/UTP Horizontal Cable 24 AWG	UTP CAT5e-4PR PVC CMR	1000 Ft. Reel	5.2 mm