


RG6 DUAL SHIELD RISER/PLENUM (CSS/BC)

FEATURES:

- Suitable for broadband networks, CCTV, CATV/SAT and other video installations
- 18 AWG bare copper (BC) or copper clad steel (CCS) center conductors
- Sequential footage marking
- Cable diameter for CMR: 0.27" for Shielded: 0.232"
- Dual shield 3.0GHz coaxial cable
- 75 Ohm impedance
- 60% Aluminum Braided

STANDARDS:

- UL or ETL Verified CMR/CMP
- SCTE IPS-SP001
- UL1655, UL13, UL444
- NEC Article 800 Compliant

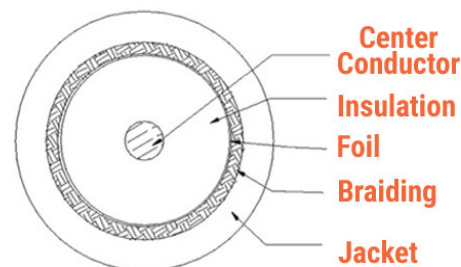

ORDERING Information:

PART NUMBER	COLOURS	PACKAGING	CENTRE CONDUCTOR TYPE	JACKET RATING
PSI-RG6URXX	W BL	500 Ft. Reelex II / 1000 Ft. Reelex II, Reel	CCS	Riser
PSI-RG6URXX-BC	W BL	1000 Ft. Reel	BC	Riser
PSI-RG6UPWH	W	1000 Ft. Reel	CCS	Plenum
PSI-RG6UPWH-DBC-500	W		BC	Riser


RG6 DUAL SHIELD DIRECT BURIAL OUTDOOR

FEATURES:

- Suitable for broadband networks, CCTV, CATV/SAT and other video installations
- High-Grade RG6 UV Rated Outdoor Direct Burial Coaxial cable
- 18 AWG copper clad steel (CCS) centre conductor
- Cable diameter 0.272"
- Sequential footage marking
- Dual Shield 3.0GHz Coaxial cable
- 75 Ohm impedance
- 60% Aluminum Braided

STANDARDS:

- SCTE IPS-SP001
- UL1655, UL13, UL444
- ETL Verified
- NEC Article 800 Compliant

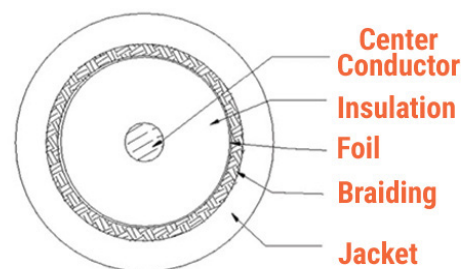

ORDERING Information:

PART NUMBER	COLOURS	PACKAGING	CENTRE CONDUCTOR TYPE	JACKET TYPE
PSI-RG60SPBK	BL	1000 Ft. Reel		Riser